

The Dock Technical Specifications

Technican: Brendan McDermott

Performance Space Dimensions

There is a retractable seating system in the performance space. Seating capacity for any show is dependent on stage area required. Maximum seating capacity is 117. See dimensions for the space below.

No Seats	31ft 9in	9680mm
1 Row (12)	29ft 0in	8830mm
2 Rows (24)	26ft 3in	8000mm
3 Rows (36)	23ft 5in	7150mm
4 Rows (48)	20ft 7in	6300mm
5 Rows (60)	18ft 0in	5485mm
6 Rows (72)	15ft 1in	4600mm
7 Rows (84)	12ft 5in	3800mm
8 Rows (96)	9 ft 7in	2940mm
9 Rows (105)	7 ft	2090mm (2m 90 cm)

With all rows out in the seating arrangement, it provides access to the 9 seats in the Back Row, so a total of 105.

There are also two floating rows of 12 seats, one rigid and one flip seat. They take up 33in (838mm), which includes leg room. These can be used in combination with movable seating.


The full row is 32ft 4in (7315mm) wide.

The cyc (back wall) is 38ft 4in (9145mm) wide.

RE-ENFORCEMENT:	
JBL MP 412 (MID/TOP WIDE)	2
JBL MP 418 S (BINS)	2
22 U STEEL RACK UNIT	1
22 U STEEL RACK UNIT	1
FRONT OF HOUSE:	
SOUNDCRAFT LX7ii 24 ch (MIXER)	1
dbx 2231 (GRAPHIC EQ)	1
dbx 231 (GRAPHIC EQ)	2
BEHRINGER MDX 4600 (QUAD GATE/ COMP)	1
LEXICON MX200 (FX UNIT)	1
8 U RACK UNIT	1
PHONIC PPC 8000 (POWER SUPPLY)	1
PLAYBACK:	
TASCAM-MDF350 (MINIDISC PLAYER)	2
DENNON C635 (CD PLAYER)	1
MONITORS:	
JBL MP 212 (MONITOR)	4
CROWN XLS 402 (AMP)	2
MICROPHONES:	
SHURE SM58 (MIC)	4
SHURE SM57 (MIC)	2
BLACK BOOM K&M MIC STANDS	4
LINKS (DI BOX)	2
BSS (DI BOX)	4
CABLES:	
6 Mtr. JACK TO JACK LEADS	4
12 Mtr MIC LEADS	10
2 Mtr RED PATCH CABLES	10
2 Mtr BLUE PATCH CABLES	10
INSERT LEADS	4
PLAYBACK LEADS	3
SHOW RELAY:	
STONEWOOD SA-CMS2 (MASTER STATION)	1
STONEWOOD (SPEAKER STATION)	2
STONEWOOD SA-CBP 1 (BELT PACK)	4
STONEWOOD CHS 1 (SINGLE MUFF HEADSET)	4
AKG D542E (GOOSE NECK MIC)	1
AUDIOTECHNICA MB 4000 (MIC)	1
CABLES:	
12 Mtr MIC CABLES	6
2.5 Mtr PATCH CABLES	2

LIGHTING:	
ETC EXPRESS 125 CONTROL DESK C/W COLOUR MONITOR	1
DIMMERS:	
WALL MOUNTED 48 WAT 2.5kW DIMMERS	2
LANTERNS:	
Thomas Par Cans- Par 62	12
ETC SOURCE 4 JUNIOR 36° PROFILE	6
ETC SOURCE 4 JUNIOR 26° PROFILE	10
RANK STRAND QUARTET PC	14
SELECON AURORA CYCLORAMA FLOODLIGHTS	8
Fittings are inclusive of colour frames, barndoors, gobo holders, safety bond, hook clamps and 15Amp plug.	
ANCILLIARY SERVICES:	
11mt. x 12WAY INTERNALLY WIRED BARS, C/W 12 NO. 15Amp SOCKETS, TERMINATION BOX AND 8MTS OF SOCAPEX TERMINATED MULTI-CORE CABLE	3
CABLES:	
10MT x 6WAY MULTI-CORE CABLES	2
10MT - 15Amp x 15Amp EXTENSION CABLES	10
5MT - 15Amp x 15Amp EXTENSION CABLES	10
PLUS SPLITTERS	

Grid Plan

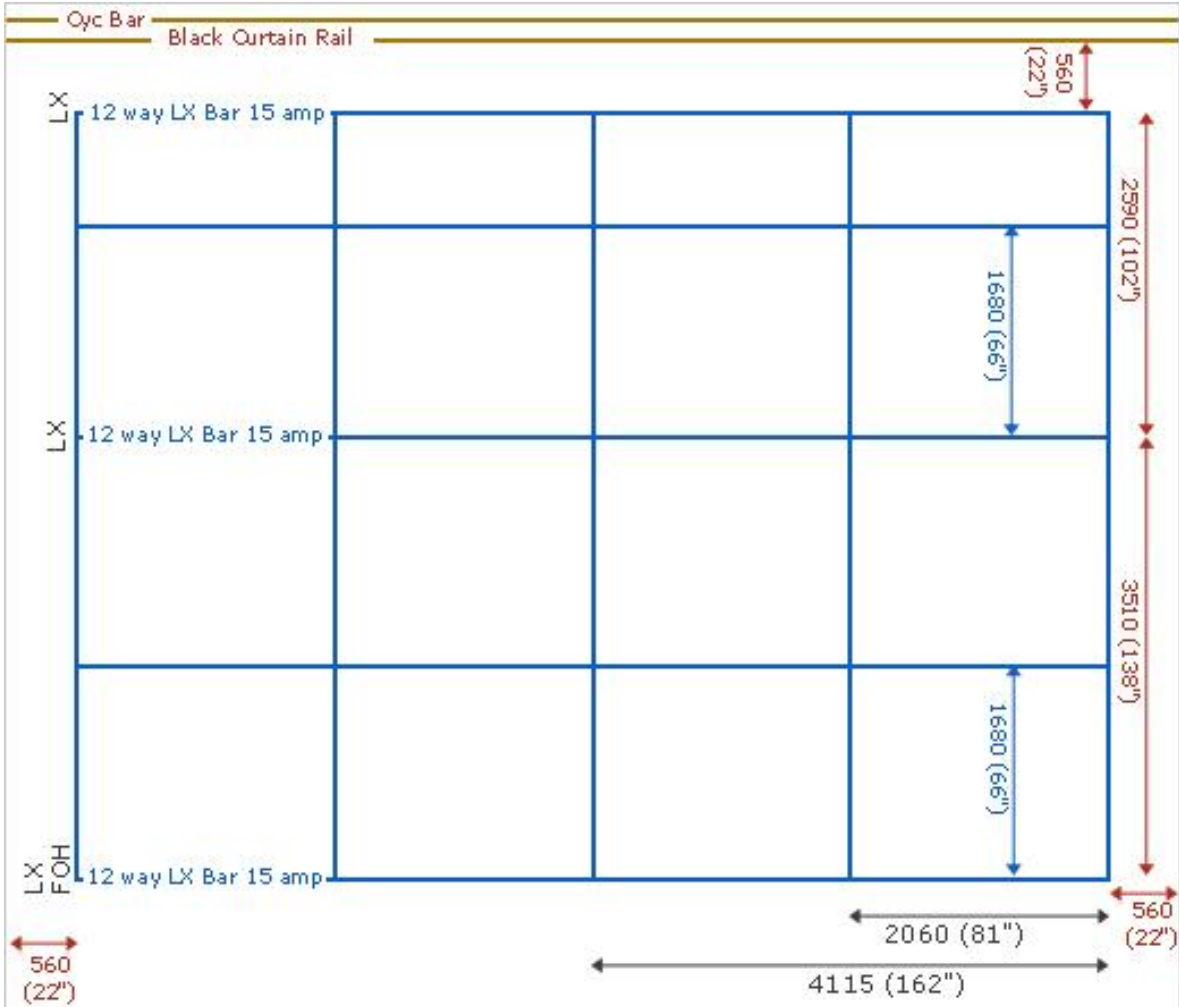

The grid frame is 560mm (22") from either side wall.
 The curtain rail is 560mm (22") behind the upstage KX bar.
 The Cvc bar hangs 120mm behind curtain rail.
 The entire grid is bolted to the wall at 5640 (18' 6") above the floor.